


Apogee Commerce Corp.


Premium LED Display Technology and Lighting Solutions.

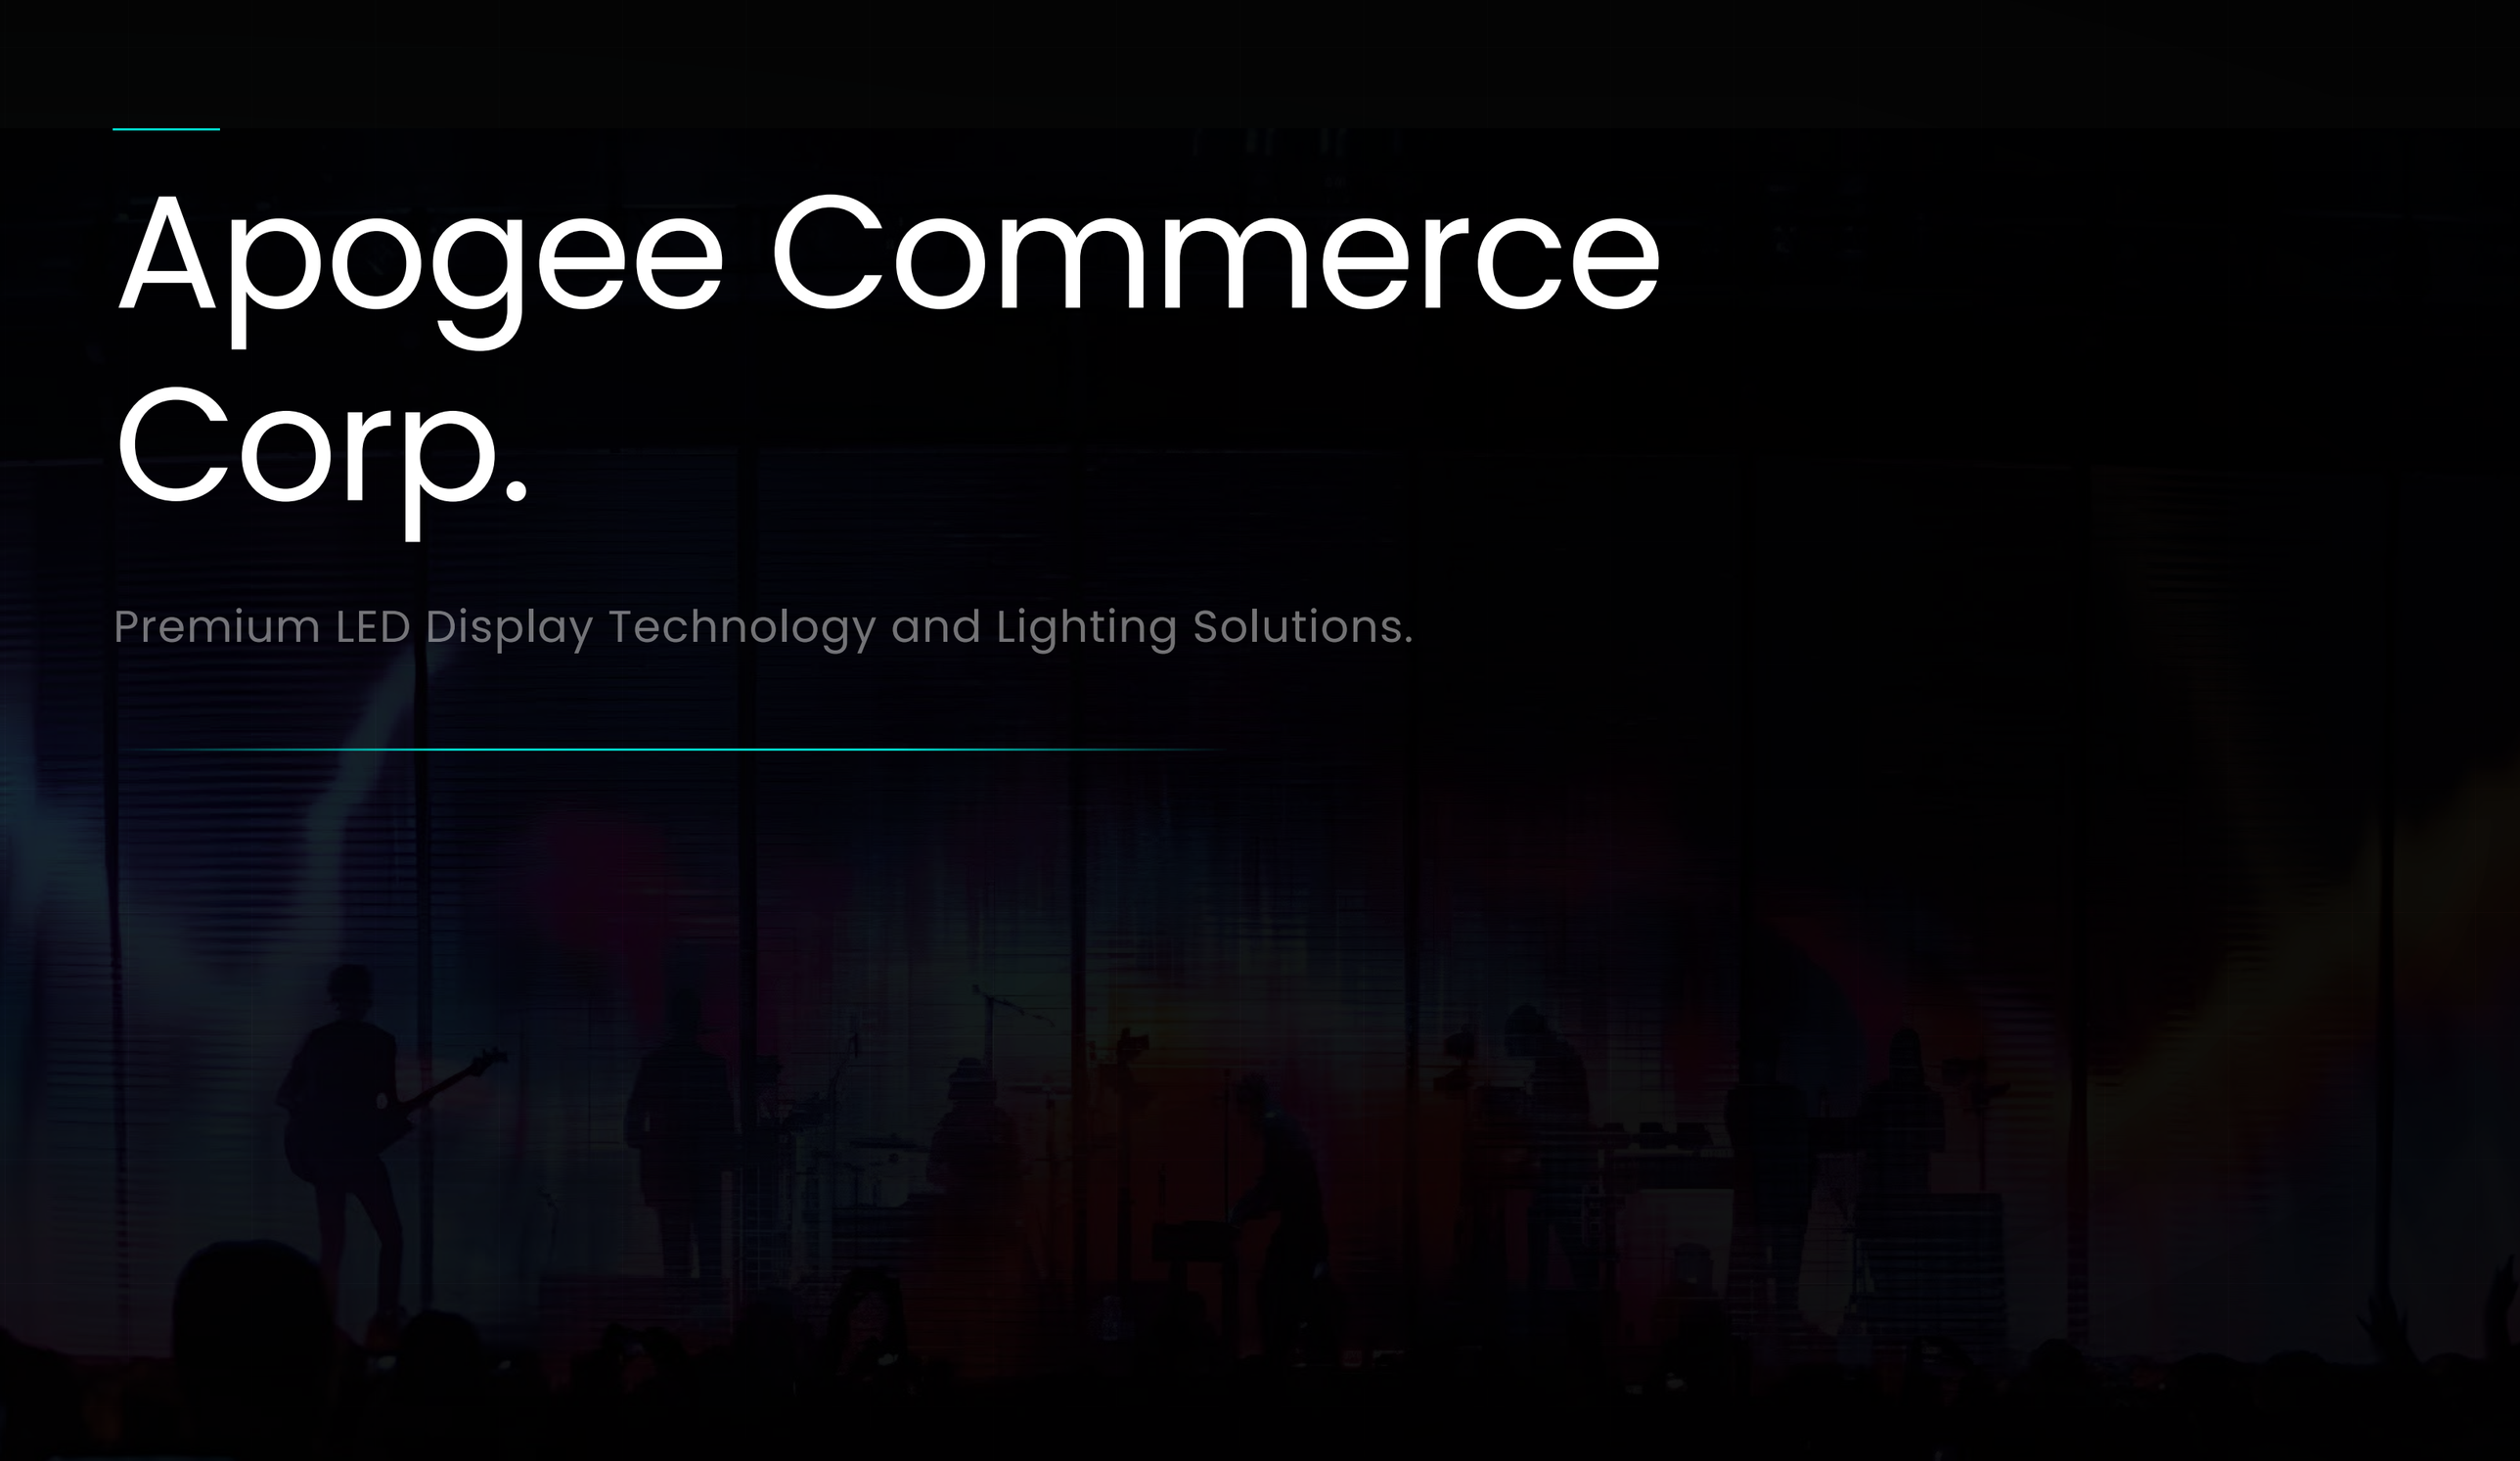

INQUIRE WhatsApp +63 960 605 5691

See Through.
Stand Out.

LED Display Technology for a New Era.

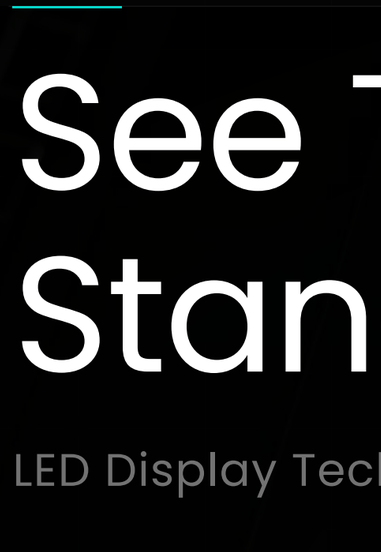

apexluminalighting.com


Apogee Commerce Corp. is a Philippines-based technology distributor specializing in cutting-edge LED display systems and comprehensive lighting solutions for residential, commercial, and industrial environments. We source directly from world-class manufacturers to deliver display and lighting products that meet the highest international standards, on time, at scale, with full technical support.



European Conformity



Restriction of Hazardous Substances



Federal Communications Commission (US)



Safety & Quality Certification



Weatherproof Rating



Impact Protection Rating

All products comply with applicable international safety and performance standards.









01 — TRANSPARENT FLEXIBLE LED

Holoflex

The world disappears. Your message doesn't.



90%

TRANSPARENCY

1.8mm

ULTRA-THIN

100K hrs

LIFESPAN


OVERVIEW

Frameless. Invisible when off. Luminous when alive. Holoflex fuses with glass — bending, cutting, curving to any surface.

INTERACTIVE


Sync / Async control · Adjustable CCT · Custom content

INQUIRE +63 960 605 5691

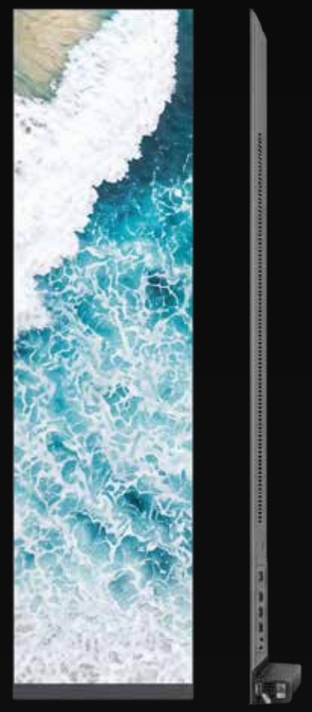

APPLICATIONS


Commercial Windows
Building Facades
Exhibition Halls
Automotive Showrooms

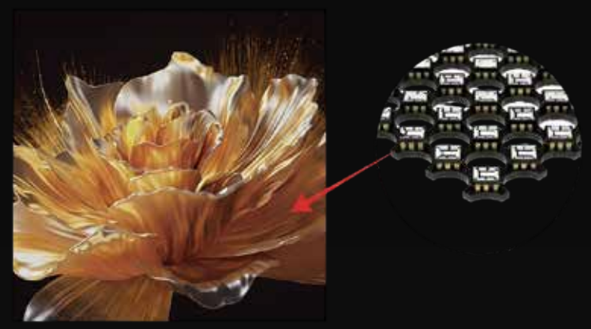

HOLOFLEX — TECHNICAL SPECIFICATIONS

Every detail. Engineered.







SPECIFICATION	P2.9	P3.91	P6.25
Pixel Pitch	2.9 mm	3.91 mm	6.25 mm
Pixel Density	112,896 /m²	65,536 /m²	25,600 /m²
Visual Transparency	>80%	>80%	>90%
Display Thickness	1.5 mm	1.8 mm	1.8 mm
Screen Brightness	3,000 cd/m²	4,000 cd/m²	5,000 cd/m²
Max Power	1,100 W/m²	1,400 W/m²	1,167 W/m²
Viewing Angle	160° / 140°	160° / 140°	160° / 140°
Grayscale	≥16-bit	≥16-bit	≥16-bit
Lifespan	≥100,000 hrs	≥100,000 hrs	≥100,000 hrs
Failure Rate	<0.05%	<0.05%	<0.05%
Operating Temp.	0°C to +60°C	0°C to +60°C	0°C to +60°C
Power Supply	110V–240V, AC 50Hz	110V–240V, AC 50Hz	110V–240V, AC 50Hz

COMMON ACROSS ALL MODELS

Control System
Synchronous / Asynchronous

LED Control
Static Scanning

Color Temperature
5,500K – 15,000K (adjustable)

Installation
Wall / Hanging / Floor Stand


Breakpoint Resumption
Supported

Module Sizes
1025 / 1200 / 1500 x 250mm

Ultra-high brightness. Ultra-fine contrast.
Engineered for environments where ordinary screens fail.

6,000 cd/m²

9,000 : 1 contrast

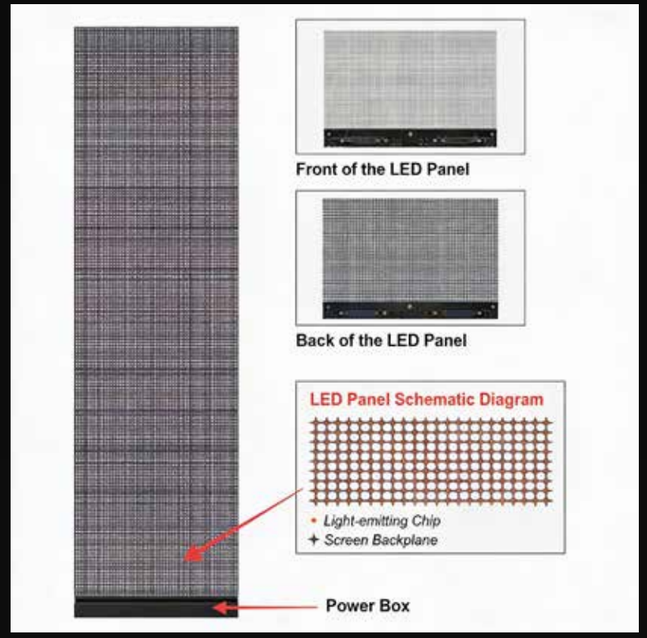

02 — FOLDABLE LED POSTER

iFlip

Anywhere. In two steps.

2,950 mm


MAX DISPLAY HEIGHT

5 units

MAX SEAMLESS SPLICING

450 mm

FOLDED HEIGHT

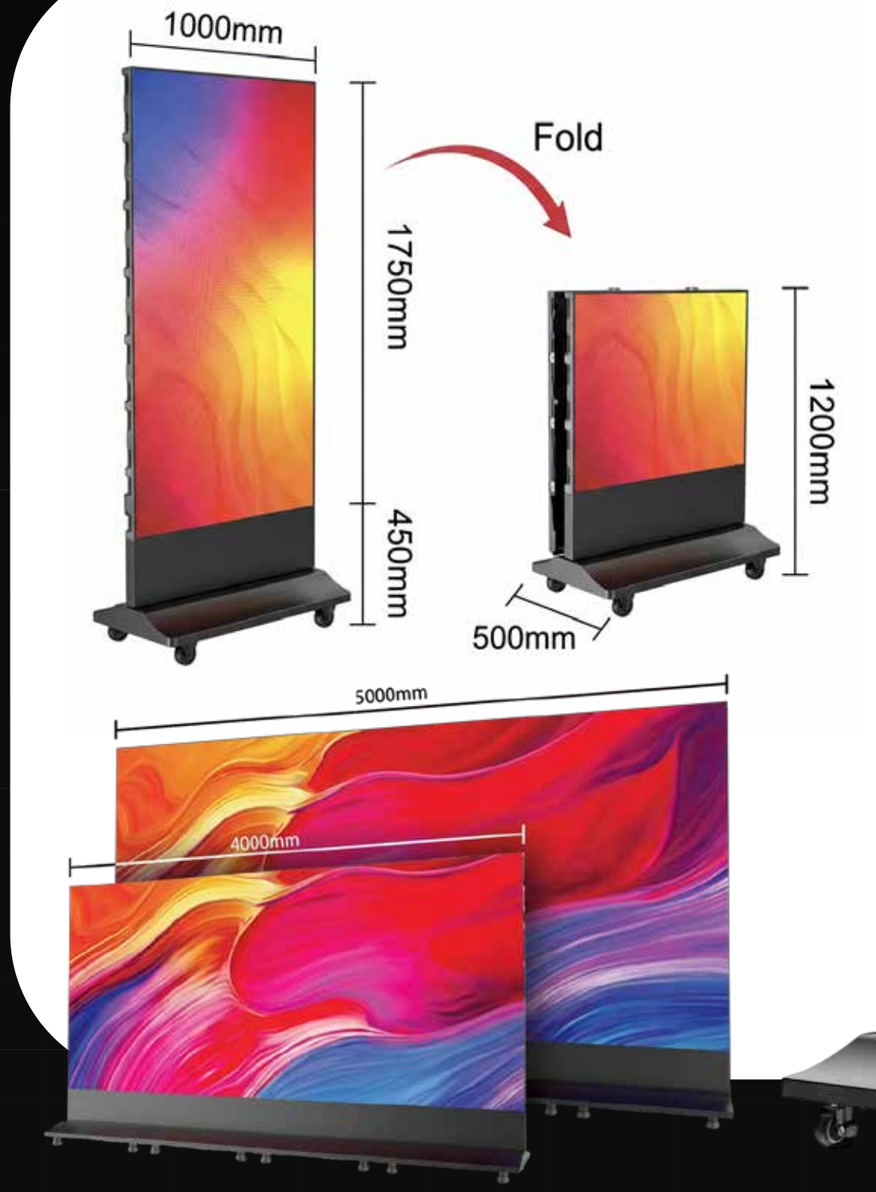



KEY FEATURES

- Two-step setup — fold, pack, done
- Fits standard elevator, standard door
- Double-sided 90° corner playback
- Seamless multi-unit splicing
- Shock-absorbing casters included

IDEAL FOR

Hotels · Churches · Airports · Schools
Museums · Conference Rooms · Malls

INTERACTIVE

Control via USB · App+WiFi · 4G · PC+HDMI
Configurable display content. Real-time.























03 — STAGE LED

Magic Stage

Unlimited possibilities for stages.





3 kg/m²

ULTRA-LIGHTWEIGHT

90 m²

IN JUST 1 m³

V1 Flame

RETARDANT RATED



Stage backdrops · Fashion shows
Concerts · Themed events
Architectural lighting

04 — FILM DISPLAY

Crystal Flex

Invisible off. Vivid on.





95%


TRANSPARENCY (INVISIBLE PCB)

2 mm


ULTRA-THIN FILM

100K hrs

LIFESPAN

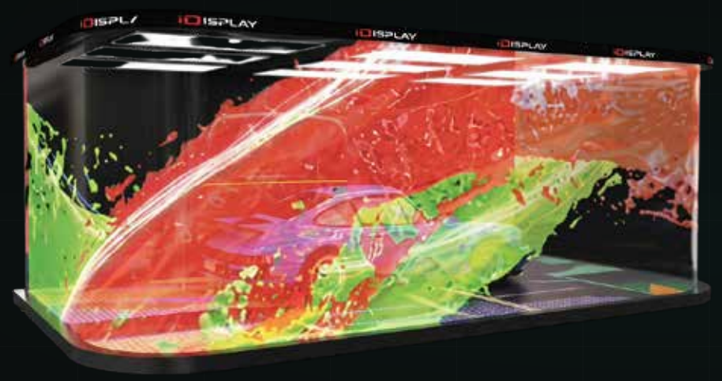

Retail storefronts · Luxury flagships
Showrooms · Museums
Hospitality interiors

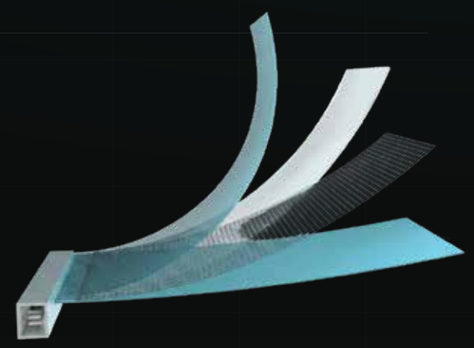

INQUIRE +63 960 605 5691



EllipseCounter

INTERACTIVE

USB · App+WiFi · 4G optional · Custom content

All-Around Visual Brilliance.

80,000 hrs
LIFESPAN

3,840 Hz
REFRESH RATE

140° / 140°
VIEWING ANGLE


OVERVIEW

A curved LED display table that fuses technology and fashion. Plug and play. Silent wheels. Front-access maintenance.

APPLICATIONS

Corporate Receptions
Trade Show Booths
DJ Booths & Events
Showroom Counters

SCAN TO SEE IT IN ACTION

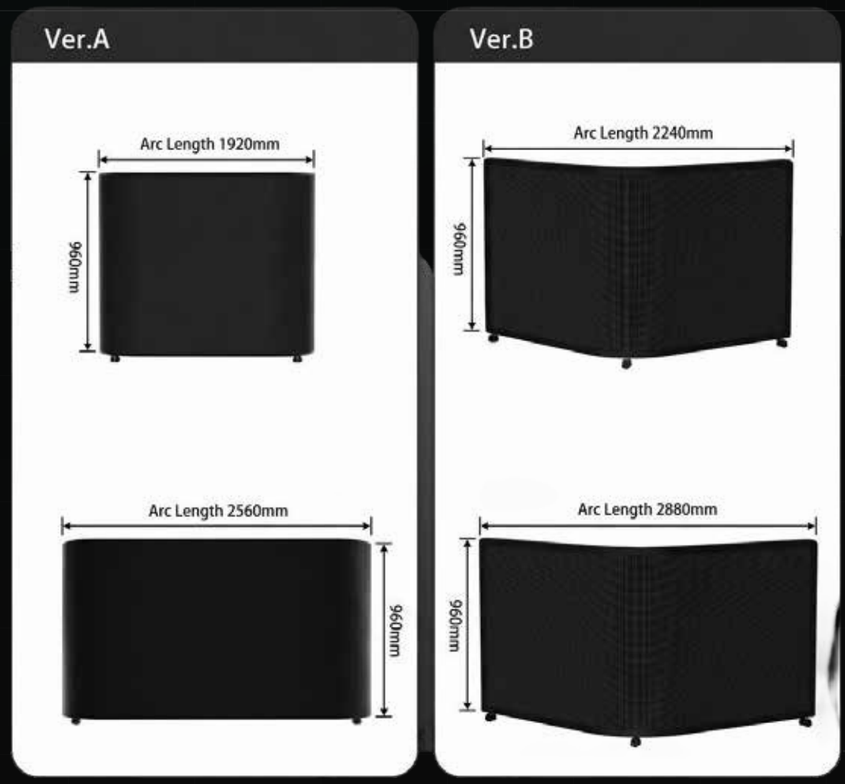

ELLIPSECOUNTER — TECHNICAL SPECIFICATIONS

Every detail. Engineered.

MODEL	P1.2	P1.5	P1.875	P2	P2.5	P3 / P4
Pixel Pitch	1.25mm	1.53mm	1.875mm	2mm	2.5mm	3mm / 4mm
Pixel Density	640,000	422,500	284,444	250,000	160,000	111,111 / 62,500
LED Type	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515	SMD2121
Brightness	500–600	500–600	500–600	500–600	600–700	600–700 cd/m²



COMMON TO ALL MODELS

Viewing Angle
140° / 140°

Refresh Rate
3,840 Hz

Color Temperature
6,000K–12,000K (adjustable)

Lifespan
80,000 hours

Dead Pixel Rate
<0.0001

Memory
1GB RAM · 16GB Storage

Control
Ethernet · Wi-Fi · USB · 4G (opt.)

Module Size
320 × 160mm

Frame Rate
60Hz

Maintenance
Front (suction tool)



DISPLAY SIZES


DISPLAY SIZE	AVG / MAX POWER	GW WITH FLIGHT CASE	NET WEIGHT
1920 × 960mm	930W / 276W	155 kg	86.5 kg
2240 × 960mm	1,230W / 368W	200 kg	114 kg
2560 × 960mm	1,075W / 322W	214.5 kg	126.5 kg
2880 × 960mm	1,382W / 414W	246 kg	148.5 kg

Four arc sizes. Seven pixel pitches. One seamless impression.

Supports USB · HDMI · Wi-Fi · Ethernet · 4G remote access.

Plug in. Play. Impress.



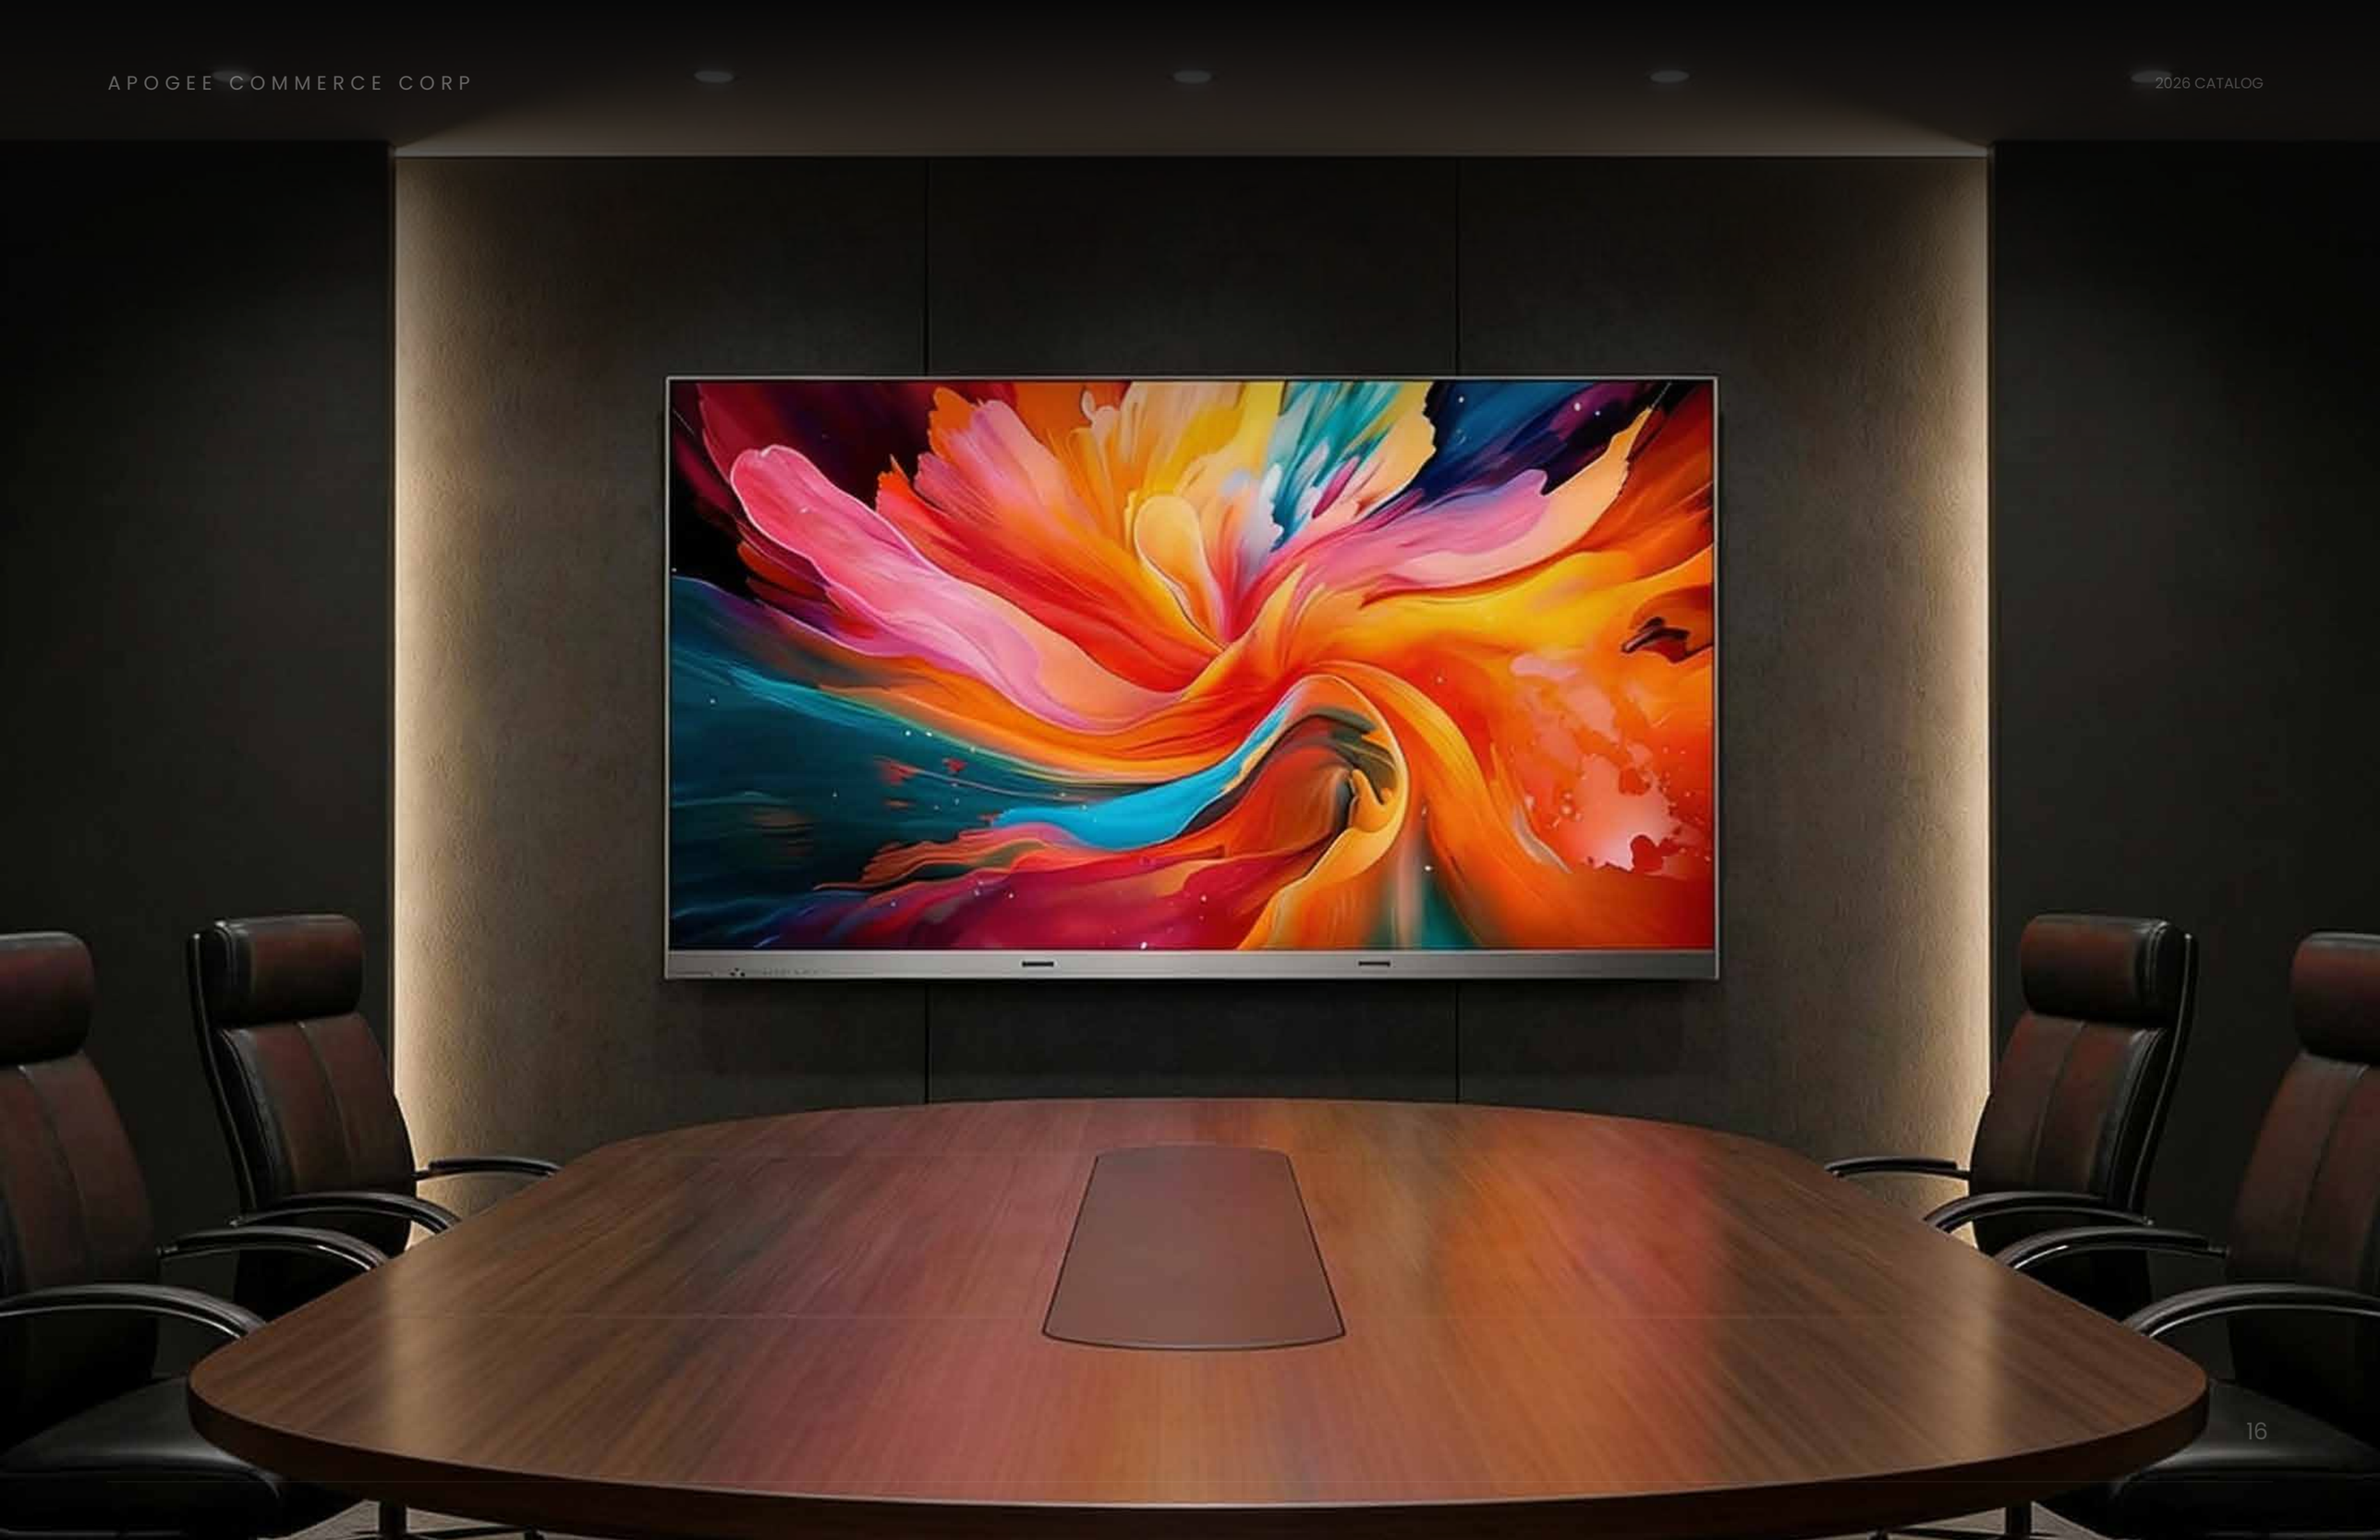

iConference

INTERACTIVE

WIRELESS CAST · VIDEO CONFERENCE · WHITEBOARD

The room is ready. Every time.

27.8mm	2 Hours	24 / 7	2×50W
ULTRA-THIN PROFILE	QUICK INSTALLATION	CONTINUOUS OPERATION	BUILT-IN AUDIO

OVERVIEW

UHD LED display integrated with a full conference ecosystem. Wireless projection. Built-in DSP. Modular. Front-access. 4K ready.



APPLICATIONS

Conference Rooms (8–100 pax)
Lecture Halls & Classrooms
Control Centers
Hotels · Airports · Hospitals



iCONFERENCE — TECHNICAL SPECIFICATIONS

Every detail. Engineered.



SCREEN SIZE	PIXEL PITCH (1080p)	PIXEL PITCH (4K)	RESOLUTION
108"	P1.25	—	1080p
135"	P1.56	—	1080p
162"	P1.875	P0.93	1080p / 4K UHD
216"	P2.5	P1.25	1080p / 4K UHD





DISPLAY & PERFORMANCE

Brightness
100–800 nits (adjustable)

Contrast Ratio
3,000:1

Refresh Rate
1,920–3,840 Hz

Viewing Angle
160° / 160°

Cabinet Depth
27.8mm ultra-thin

Cabinet Weight
5 kg per cabinet

Maintenance
Front access

AUDIO & CONNECTIVITY

Built-in Audio
2×50W Amplifier + DSP

AEC / Noise Suppression
Supported

Wi-Fi Screen Casting
Supported

H.265 AV over IP
Supported (Pro model)

Video Conference
Supported

Power
AC 100–240V, 50/60Hz

Certificates
CE · RoHS · FCC · TUV



ROOM SIZE GUIDE

ROOM TYPE	CAPACITY	RECOMMENDED SIZE
Small Meeting Room	8–12 people	108" / 135"
Medium Conference Room	20–50 people	162"
Lecture Hall	80–100 people	216"
Control Center	Custom	Multi-screen configuration



One screen. Every room. Every meeting.


Flight case: 1350 × 1600 × 450mm · Models: iConference & iConference Pro

INQUIRE +63 960 605 5691

ALSO IN OUR PORTFOLIO

UTD^{AR} Film

Holographic AR Projection Film

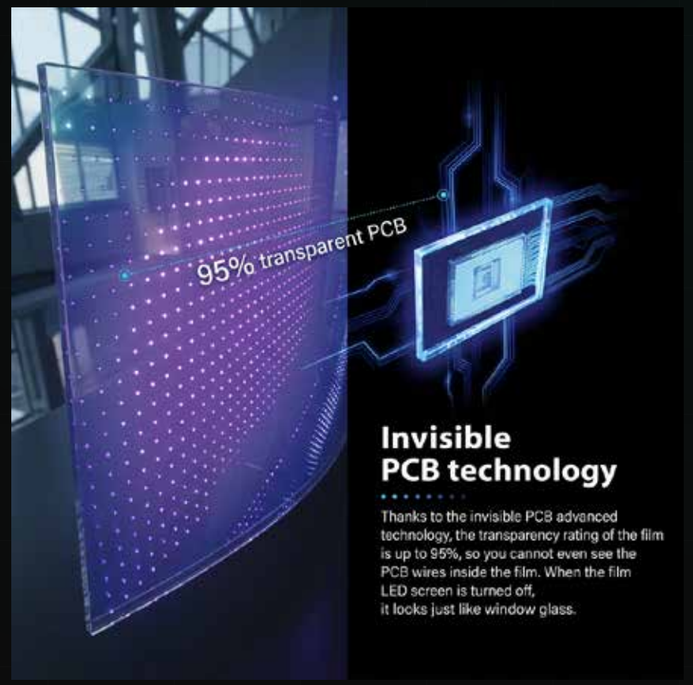

Transforms ordinary glass into stunning holographic displays.

WIDTH UP TO 1,300mm · PRICE ON REQUEST

INQUIRE +63 960 605 5691



ALSO IN OUR PORTFOLIO

UTD^{AR} WELCOME VIP SCREEN


Standalone Holographic Greeter

A premium first-impression display for executive entrances. Widely used in corporate exhibition halls, exhibition centers, banks, airports, and premium commercial spaces.

WIDTH 1,800 × 800mm · US$ 4,899.00

**Note: Includes a 5,500-lumen laser projector.*

INQUIRE +63 960 605 5691

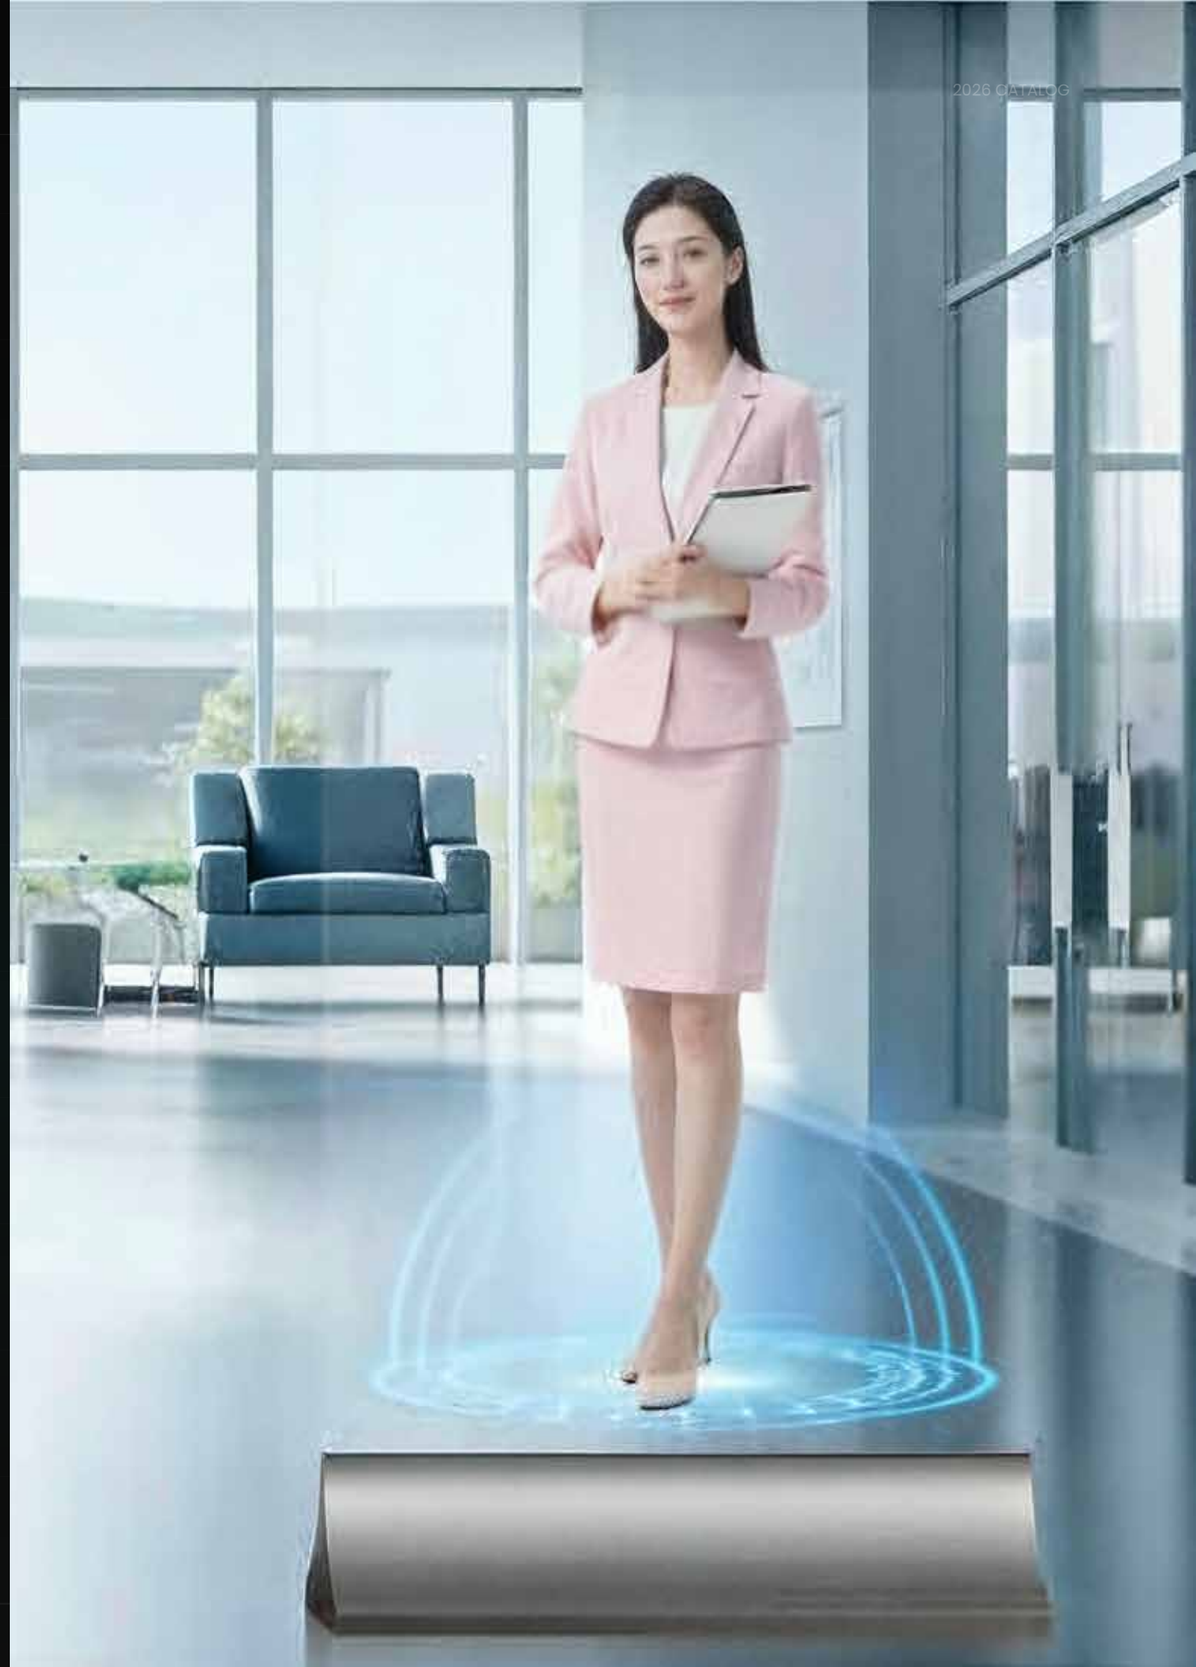



ALSO IN OUR PORTFOLIO

Silent Pod

Acoustic Privacy Booth

Premium soundproof pods for focused work, calls, and private meetings.

1, 2 & 4-PERSON CONFIGURATIONS


LIGHTING SOLUTIONS

Every fixture. Any space.

A selection from our complete lighting range.



RESIDENTIAL
Recessed Downlight

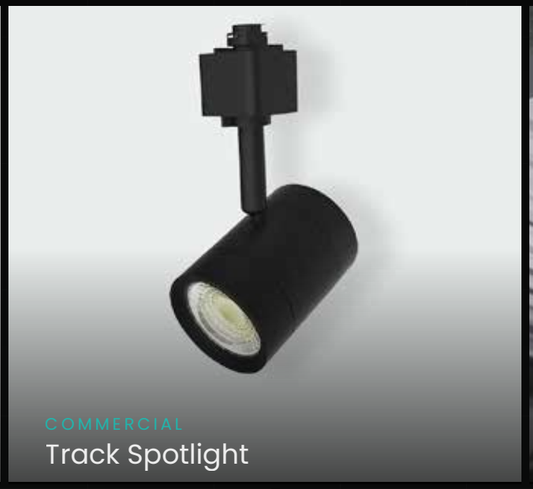

COMMERCIAL
Track Spotlight



INDUSTRIAL
UFO High-Bay



RESIDENTIAL
LED Strip & Channel



COMMERCIAL
Linear Troffer



INDUSTRIAL / OUTDOOR
Outdoor Floodlight

If it lights a space, we can supply it.

Don't see what you're looking for? Just ask.


9 CATEGORIES

72+ PRODUCT TYPES

FULLY SOURCEABLE



HOSPITALITY & DECORATIVE
Wall Sconce & Accent Lighting

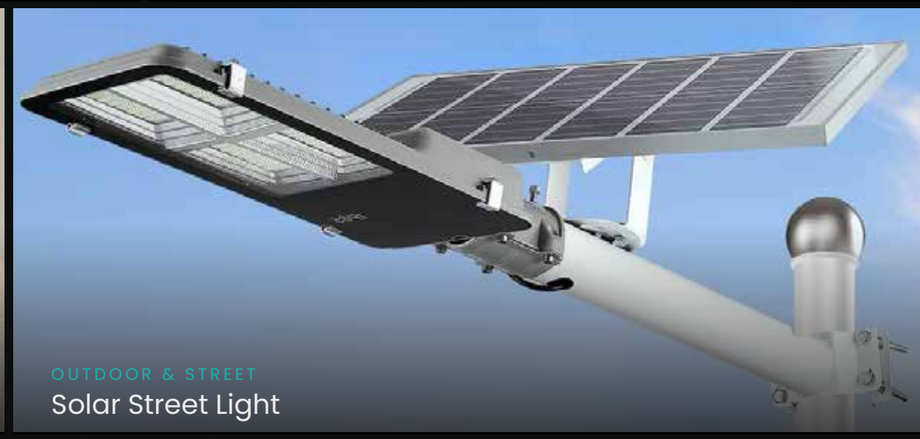

OUTDOOR & STREET
Solar Street Light

INQUIRE +63 960 605 5691

Transform your space.

Let's talk about what's possible.

CONTACT

WhatsApp +63 960 605 5691

DISTRIBUTED BY

Apogee Commerce Corp.

