


APOGEE
COMMERCE CORP.



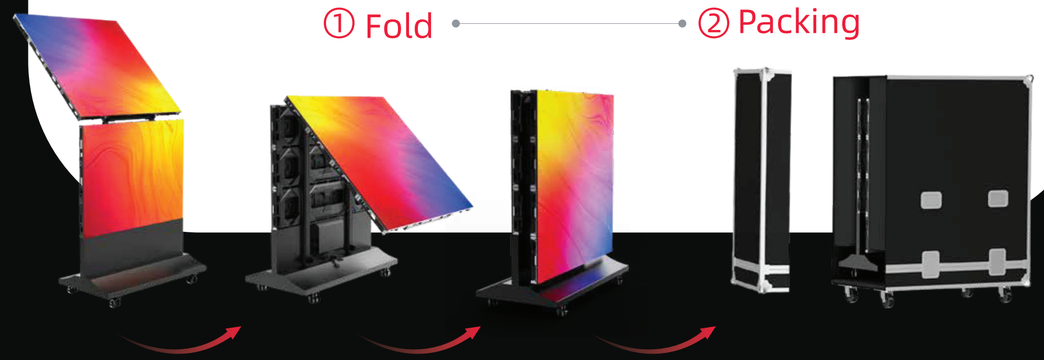

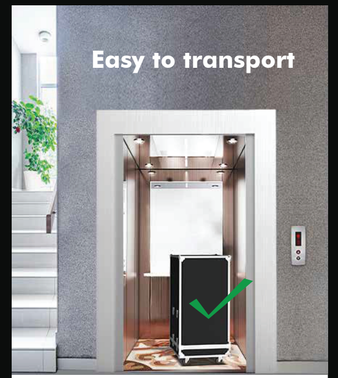

Easily enter the elevator,No dedicated freight elevator required

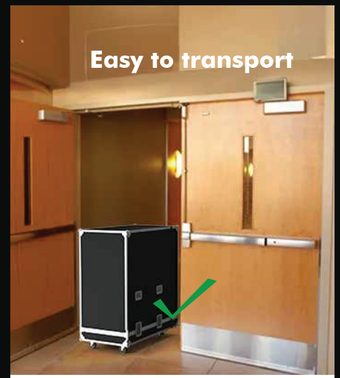

Accessible through regular sized doors

iFlip

Foldable advertising poster

iFlip is a versatile LED standee with seamless assembly for smooth displays and a foldable design that fits into a flight case, ensuring easy transport in cars and buildings. It is ideal for various applications including hotels, training rooms, auditoriums, churchs, schools and transport hubs.



Max Height **2950**mm
Maximize Your Visual Impact



Random combination and splicing, seamless display



Double-sided corner splicing

iFlip can form double-sided corner screens, which can achieve fast 90-degree and more than 90 degree seamless splicing, provide flexible configuration and dynamic viewing angle, and enhance visual impact.

APOGEE
COMMERCE CORP.

INQUIRE NOW
+63 917 509 8344


iFlip Specifications						
Pixel Pitch	P1.9	P2.6	P1.9	P2.6	P1.9	P2.6
Viewing distance	>1.9m	>2.6m	>1.9m	>2.6m	>1.9m	>2.6m
Module size	250x250mm		250x250mm		250x250mm	
Module Resolution	128 x 128dots	96 x 96dots	128 x 128dots	96 x 96dots	128 x 128dots	96 x 96dots
Cabinet size	(W)1000 x (H)1750mm		(W)1000 x (H)2000mm		(W)1000 x (H)2500mm	
Cabinet Resolution	512*896dots	384 x 672dots	512*1024dots	384 x 768dots	512*1280dots	384x 960dots
Weight (kgs)/unit	116		133		166	
Max Splicing Units	4 units	5 units	4 units	5 units	4 units	5 units
Display size (W)*(H)	4000*1750mm	5000*1750mm	4000*2000mm	5000*2000mm	4000*2500mm	5000*2500mm
Display Resolution	2048*896dots	1920*672dots	2048*1024dots	1920*768dots	2048*1280dots	1920*960dots
Combined Weight (kgs)	464	580	532	665	664	830
Scanning Mode	32s					
Power consumption (max./ave.)	550W/m² / 160W/m² for indoor; 750W/m² / 230W/m² for semi-outdoor					
Brightness	indoor 500-800nits, semi outdoor 3000-5000nits					
IP rate	IP20					
Gray scale	14bit					
Refresh rate	1920-3840Hz					
Maintenance method	Front & Rear					
Viewing angle	160°/160					
Display scale	4398Billion					
Environmental	indoor/semi-outdoor					
Operation power	AC100-240V 50/60Hz					
Brightness Adjustment	0-100 levels adjustable					



iFlip P1.9 supports up to 4 units for splicing.



iFlip P2.6 supports up to 5 units for splicing.

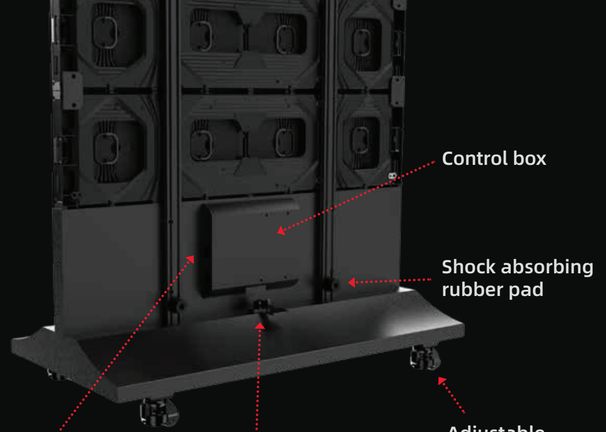

Foldable, achieve double-sided playback!



Scenario application:

School, church, museum, hotel, resturant, theater, shopping mall, airport, train station, training room, conference room, showroom, bank, telecommunications hall, etc.





